

TO WHOM SO EVER IT MAY CONCERN.

PROPERTIE OF STYLE - 83 P.T.F.E. GLAND PACKING

- 1. Description : IMPREGNATED PTFE, PTFE GRAPHITE & FILAMENT ARAMID COMBINATION
- 2. Ingredient : PTFE GRAPHITE WITH FILAMING ARAMID YARN
- 3. Construction : A high quality combination packing of Graphite bonded PTFE yarn With Filament Aramid corners.

Properties of P.T.F.E. Fine Powder:

Properties	Test Method	Unit	Nominal Value
Powder Properties			
Bulk Density	ASTM D 4895	g/l	500
Average particle size (d ₅₀)	ASTM D 4895	µm	525
Processing			
Extrusion pressure (Reduction ratio 400:1)	ASTM D 4895	MPa (psi)	35 (5076)
Mechanical Properties			
Std. specific gravity (SSG)	ASTM D 4895	-	2.175
Tensile Strength	ASTM D 4895	Mpa (psi)	33 (4786)
Elongation	ASTM D 4895	%	330

Properties of Kevlar


- 1. Relative Density : 1.44 g/cc
- 2. Minimum tensile strength : 2920 Mpa
- 3. Elongation at break : 3.6 %

Properties of Graphite

- 1. Graphite : 99% PURE

Properties of Silicon Oil

- 1. Silicon Content : 100%
- 2. Specific Gravity : 0.967 – 0.975
- 3. Viscosity @ 25 °C : 1000 +/- 50 CST
- 4. Appearance : Water White
- 5. Flash Point : 304 °C

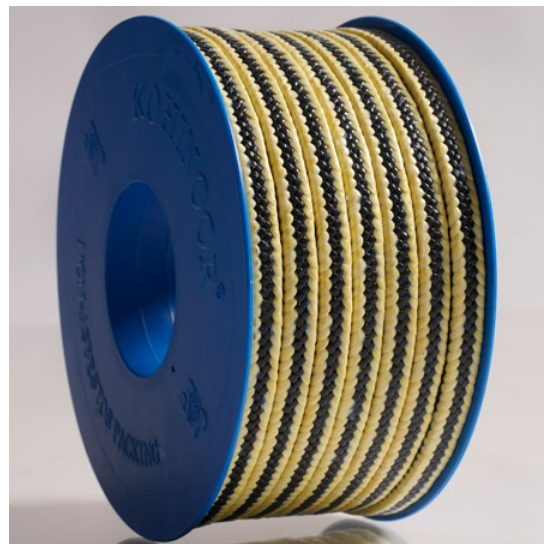

Service Parameters

Service Parameters :	Temp.	pH	Pressure	Velocity
	°C	Range	Kg/cm ²	Mtrs/Sec

🏠 182/3, Ranipur Gam, Opp. Bal Hanuman Fabrics,
Near Anand Industrial Estate, Narol, Ahmedabad-382 405. INDIA.

☎ +91-79-3244 5340 / +91 99130 63634

✉ info@sanghviproducts.com

🌐 www.sanghviproducts.com



	-240 to +260	0-12	200	20
--	--------------	------	-----	----